DRS280

Synchronous, 100 Mhz, ECC, 3.3V, 232 Pin DIMMs

Products in Family

DRS280/2048 (4 x 512MB DIMMs)
DRS280/4096 (4 x 1GB DIMMs)

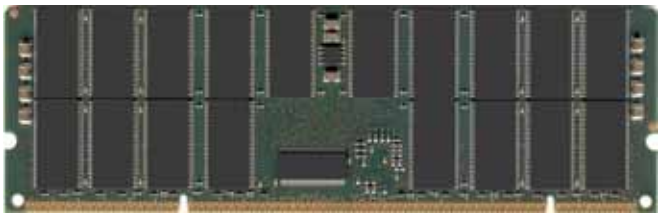

Features	Description
232-pin Synchronous DIMMs 163.07 mm wide by 50.8 mm high (6.42”x2.0”) Data Transfer Rate: 1.6 Gigabytes/sec Operating Voltage: 3.3V RoHS Compliant	Each DRS280 upgrade consists of a matched set of four Synchronous DIMMs with ECC functionality. One 64KB CMOS EEPROM is used for Serial Presence Detect.

Dataram Product	Sun Product	Supported in these Sun systems:
DRS280/2048 DRS280/4096	X7051A, X7051A-Z, X7062A X7056A, X7056A-Z	Sun Fire 280R, V480, V490, V880, V880z, V890, V1280, E2900, 3800, E4900, 4800, 4810, E6800, E6900, Netra 20, Netra 1280, Netra 1290, Blade 1000, 2000.

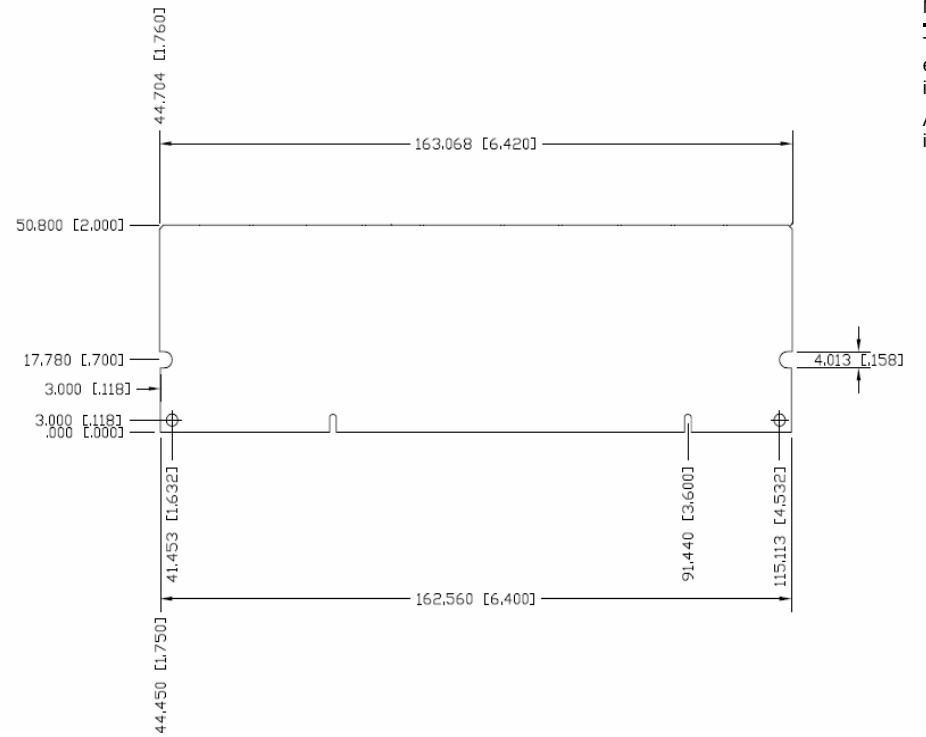

Notes

Tolerances on all dimensions except where otherwise indicated are ±.13 (.005).

All dimensions are expressed in millimeters [inches]

Copyright © 2010 Dataram Corporation | U.S.A. Headquarters +1 609-799-0071 | Offices in Europe and Asia | www.dataram.com

The information contained in this document has been carefully checked and is believed to be reliable and accurate. However, Dataram assumes no responsibility for errors.